

# C-Series 32C Universal Temperature/Process Controller

Distributed By: B.J. Wolfe Enterprises, Inc

Tel: (800) 554-1224, Fax: (818) 889-8417, Email: info@bjwe.com



The Athena 32C is a 1/32 DIN panel mounted, auto-tuning controller that can be used for precise control of a single loop with two independent outputs field-configurable as direct acting, reverse acting or alarm. An LED display provides visual indication of various controller functions.


- ▲ Field-Configurable Universal Inputs
- ▲ Bumpless Auto/Manual Transfer
- ▲ NEMA 4X (IP65) Dust and Splash-Proof Front Panel
- ▲ Decimal Display in 0.1° for Measured Temperatures Under 1000°F or °C
- ▲ On/Off through Full PID Operation (P, PI, PD, PID)
- ▲ Adjustable Hysteresis and Deadband
- ▲ Outputs Configurable as Alarms
- ▲ Field-Configurable Process and Deviation Alarms (Latching or Non-Latching)
- ▲ Dual Output/Dual Alarm Capabilities
- ▲ UL, cUL and CE Approvals
- ▲ Special and Custom Options Available



## Range Information

Input	Range	Input	Range
"J"	-148°F to 1400°F (-100°C to 760°C)	100 ohm RTD	-328°F to 1562°F (-200°C to 850°C)
"K"	-220°F to 2462°F (-140°C to 1350°C)	100 ohm RTD (Decimal)	-199°F to 392°F (-128°C to 200°C)
"T"	-202°F to 752°F (-130°C to 400°C)		
Millivolt Linear (Scaleable)	0 to 50mV/10 to 50mV	Current Linear (Scaleable)	4 to 20mA, 0 to 20mA

## Ordering Information

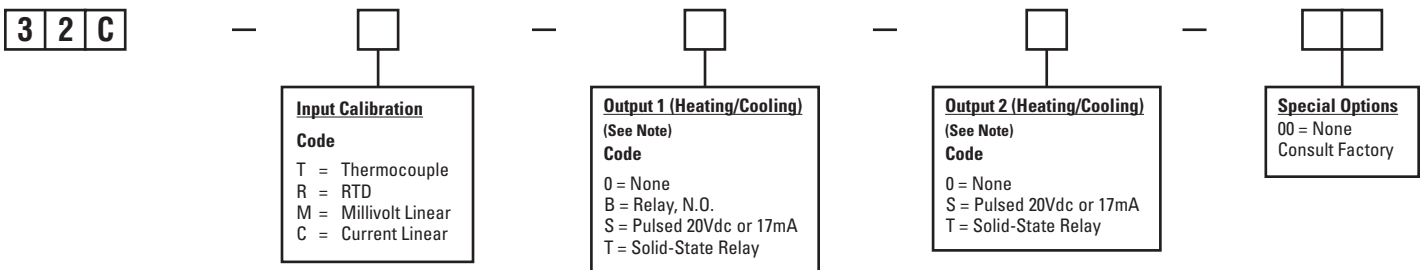

**Note:** Both Outputs MUST be Field Configured to be either Direct Acting or Reverse Acting

# C-Series 32C Universal Temperature/Process Controller

Distributed By: **B.J. Wolfe Enterprises, Inc**  
 Tel: (800) 554-1224, Fax: (818) 889-8417, Email: info@bjwe.com

## Technical Specifications

### Operating Limits

Ambient Temperature	32°F to 140°F (0°C to 60°C)
Relative Humidity Tolerance	90% R.H. maximum, non-condensing
Line Voltage Power	85 to 265 Vac, 50/60 Hz 120 to 375 Vdc, (auto polarity)
Power Consumption	Less than 6 VA (instrument)

### Performance

Accuracy	± 0.2% of full scale, ±1 digit
Setpoint Resolution	1.0 count/0.1 count
Repeatability	±1.0 count
Temperature Stability	5 µV/°C (maximum)
TC Cold-End Tracking	0.05°C/°C ambient
Noise Rejection	100 dB common mode 70 dB series mode
Process Sampling	3.5 Hz (270 ms)

### Control Characteristics

Setpoint Limits	Span of sensor
Alarms	Adjustable for high/low; selectable process or deviation
Proportional Band	1 to span of sensor
Integral	0 to 9600 sec
Derivative	0 to 2400 sec
Cycle Time	0.3 to 120 sec
Control Hysteresis	1 to span of sensor
Deadband	Range of sensor
Manual Control	Operator initiated
Auto-Tune	Operator initiated

### Inputs

Thermocouple	J, K, T Maximum lead resistance, 100 ohms for rated accuracy
RTD	Platinum 2-wire, 100 ohms at 0°C, DIN curve standard (0.00385)
Linear	0-50mV/10-50mV 4-20mA/0 to 20mA
Decimal Position	Selectable: none, 1/10, 1/100

### Outputs

B	5 A/3 A (120/240Vac) normally open
S	20Vdc pulsed or 17mA
T	1 A, Solid-state relay

### Mechanical Characteristics

Display	4-digit 0.39" (10 mm) LED display
Front Panel Rating	NEMA 4X (IP65)
Connections	Screw Terminals
Numeric Range	-1999 to 9999
Front Panel Cutout	0.874" x 1.771" (22.19 mm x 45 mm)

Specifications subject to change without notice.

